

Excavator attachments

Demolition, recycling and earth-moving.
Experience our Hydraulic Attachment Tools.



PART OF THE ATLAS COPCO GROUP

Cutting edge

Our multi-purpose Combi Cutters with various jaw type options can be used flexibly in primary demolition and secondary reduction of concrete structures as well as cutting steel structures at demolition sites.

360° endless **hydraulic rotation** allows optimal positioning and precise handling.

Faster working cycles thanks to the integrated **speed valve**.

Full hydraulic cylinder protection thanks to the **piston rod guards**.


CAPS, the Coupling and Positioning System, makes it easy to switch jaw types on site to suit the work in hand.



Crushing teeth of U-version are replaceable.


Cutting blades of the U- and S-versions are both replaceable and reversible.

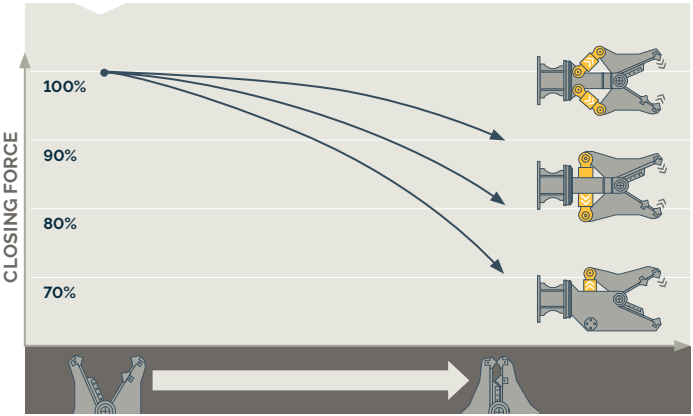

Two powerful hydraulic cylinders deliver virtually constant closing force for high productivity.




Our highly dependable and versatile Combi Cutters feature two powerful hydraulic cylinders for superior productivity.

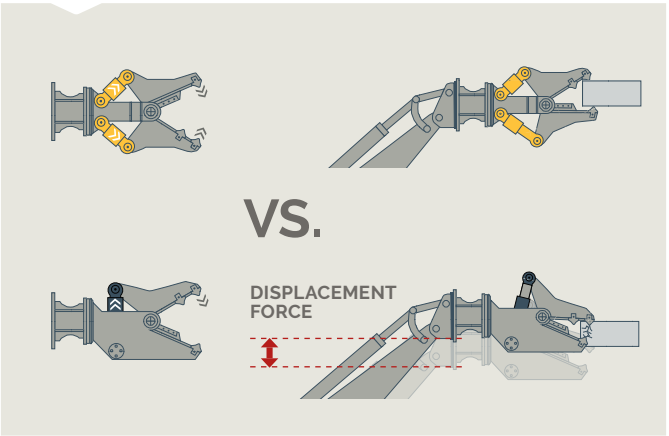Two independently moving jaws eliminate displacement force, thus lowering stress levels.



CC range			CC 1700	CC 2500	CC 3700	CC 5000	CC 7000
Carrier weight class ¹⁾		t	15 – 25	22 – 35	32 – 50	45 – 65	58 – 85
Universal version (U)							
	Service weight ²⁾	kg	1,900	2,840	3,700	5,050	7,100
	Product weight	kg	1,760	2,610	3,400	4,730	6,450
	A	mm	2,044	2,260	2,420	2,960	3,100
	B	mm	740	860	1,000	1,300	1,400
	C	mm	615	725	765	1,090	1,150
	D	mm	350	350	525	525	525
	F1	t	225	370	510	620	830
	F2	t	57	90	126	155	180
Steel cutting version (S)							
	Service weight ²⁾	kg	1,750	2,550	3,400	4,830	6,750
	Product weight	kg	1,610	2,340	3,110	4,510	6,000
	A	mm	1,868	2,095	2,320	2,800	2,930
	B	mm	370	400	440	720	750
	C	mm	430	460	625	865	900
	D	mm	380	380	525	875	875
	F1	t	225	370	510	620	830
	F2	t	79	130	147	198	205
Universal & Steel cutting version							
Cycle time (opening/closing)		sec	17 / 16	3.1 / 2.9	3.0 / 2.8	3.7 / 3.2	3.7 / 3.7
Oil flow rate		l/min	150 – 250	150 – 250	220 – 350	350 – 450	450 – 550
Max. operating pressure		bar	350	350	350	350	350
Oil flow rate		l/min	35 – 50	35 – 50	35 – 50	45 – 55	45 – 55
Max. operating pressure		bar	170	170	170	115	115

¹⁾ Weights apply to standard carriers only. Any variances must be agreed with Epiroc and/or the carrier manufacturer prior to attachment.
²⁾ Attachment with average-sized adapter plate.

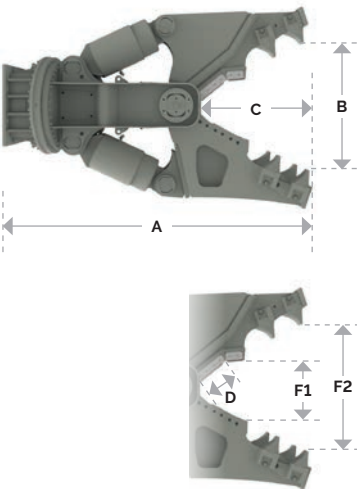



Western Australia:

📞 +61 8 9248 9800
📠 +61 8 9209 3697

33-37 Denninup Way
Malaga, Perth
WA 6090

Queensland & NT:

📞 +61 7 3635 7333
📠 +61 7 3635 7355

76 Dulacca Street
Acacia Ridge, Brisbane
QLD 4110

WWW.BAEG.COM.AU

sales@baeg.com.au

United in performance. Inspired by innovation.

Performance unites us, innovation inspires us, and commitment drives us to keep moving forward. Count on Epiroc to deliver the solutions you need to succeed today and the technology to lead tomorrow.
epiroc.com



PART OF THE ATLAS COPCO GROUP