

# Excavator attachments

Demolition, recycling and earth-moving.  
Experience our Hydraulic Attachment Tools.



PART OF THE ATLAS COPCO GROUP

# Cutting edge

Our multi-purpose Combi Cutters with various jaw type options can be used flexibly in primary demolition and secondary reduction of concrete structures as well as cutting steel structures at demolition sites.

360° endless **hydraulic rotation** allows optimal positioning and precise handling.

Faster working cycles thanks to the integrated **speed valve**.

Full hydraulic cylinder protection thanks to the **piston rod guards**.

**CAPS**, the Coupling and Positioning System, makes it easy to switch jaw types on site to suit the work in hand.




**Crushing teeth** of U- and P-version are replaceable.

**Cutting blades** of the U-, S- and P-versions are both replaceable and reversible.




Two powerful hydraulic cylinders deliver virtually constant closing force for high productivity.

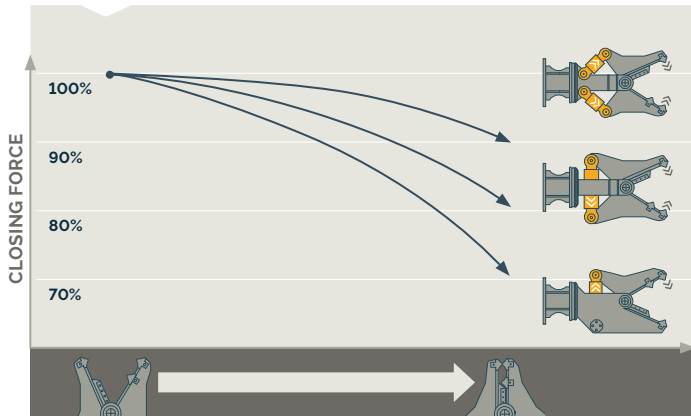

Our highly dependable and versatile Combi Cutters feature two powerful hydraulic cylinders for superior productivity.



Two independently moving jaws eliminate displacement force, thus lowering stress levels.

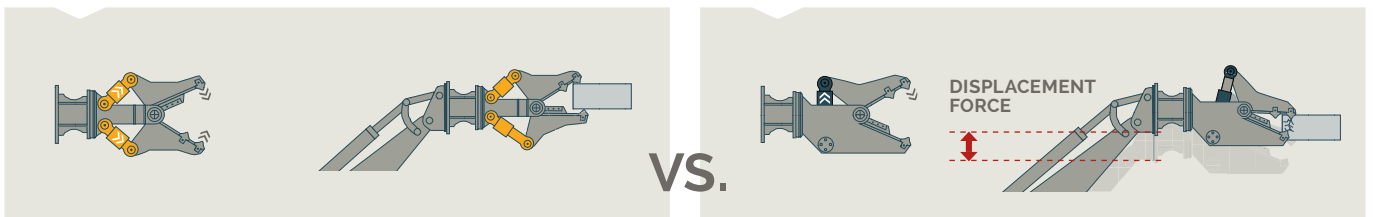

**CC range**

Carrier weight class <sup>1)</sup> t CC 1600 CC 2300 CC 3100 CC 3700 CC 5000 CC 7000

Universal version (U)

	Service weight <sup>2)</sup>	kg	1600	2.300	3.100	3.700	5.050	7.100
	Product weight	kg	1.425	2.150	2.880	3.400	4.730	6.450
	A	mm	1.862	2.159	2.341	2.420	2.960	3.100
	B	mm	700	750	870	1.000	1.300	1.400
	C	mm	490	660	700	765	1.090	1.150
	D	mm	350	350	350	525	525	525
	F1	t	197	257	430	510	620	830
	F2	t	57	70	104	126	155	180

**Steel cutting version (S)**


	Service weight <sup>2)</sup>	kg	1.540	2.100	2.850	3.400	4.830	6.750
	Product weight	kg	1.340	1.950	2.635	3.110	4.510	6.000
	A	mm	1.786	1.983	2.059	2.320	2.800	2.930
	B	mm	380	415	400	440	720	750
	C	mm	385	485	465	625	865	900
	D	mm	380	380	380	525	875	875
	F1	t	197	294	430	510	620	830
	F2	t	61	87	145	147	198	205

**Pulverizer version (P)**

	Service weight <sup>2)</sup>	kg	-	-	3.450	-	-	-
	Product weight	kg	-	-	3.250	-	-	-
	A	mm	-	-	2.265	-	-	-
	B	mm	-	-	840	-	-	-
	C	mm	-	-	630	-	-	-
	D	mm	-	-	140	-	-	-
	E	mm	-	-	700	-	-	-
	F1	t	-	-	220	-	-	-
F2	t	-	-	110	-	-	-	

**Universal (U), Steel cutting (S) & Pulverizer (P) version**

Cycle time (opening/closing)	sec	1.3/1.3	1.7/1.6	3.1/2.9	3.0/2.8	3.7/3.2	3.7/3.7
Oil flow rate	l/min	150-250	150-250	150-250	220-350	350-450	450-550
Max. operating pressure	bar	170	350	350	350	350	350
Oil flow rate	l/min	35-50	35-50	35-50	35-50	45-55	45-55
Max. operating pressure	bar	170	170	170	170	115	115

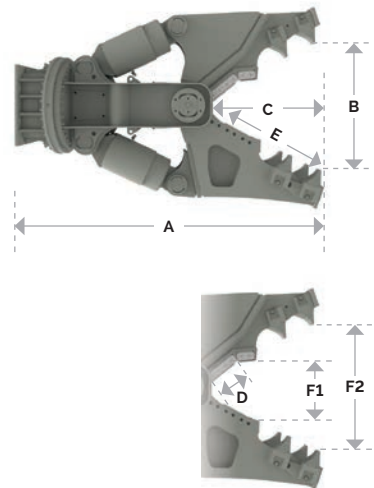

<sup>1)</sup>Weights apply to standard carriers only. Any variances must be agreed with Epiroc and/or the carrier manufacturer prior to attachment.

<sup>2)</sup> Attachment with average-sized adapter plate.

# BA BREAKERS & ATTACHMENTS

## Western Australia:

☎ +61 8 9248 9800  
📠 +61 8 9209 3697

33-37 Denninup Way  
Malaga, Perth  
WA 6090

## Queensland & NT:

☎ +61 7 3635 7333  
📠 +61 7 3635 7355

76 Dulacca Street  
Acacia Ridge, Brisbane  
QLD 4110






## Victoria:

☎ +61 3 9308 8202  
📠 +61 3 9308 8872

32 Freight Drive  
Somerton, Melbourne  
VIC 3062

**WWW.BAEG.COM.AU**

[sales@baeg.com.au](mailto:sales@baeg.com.au)

-  [facebook.com/epirocdemolition](https://facebook.com/epirocdemolition)
-  [facebook.com/epirocgroup](https://facebook.com/epirocgroup)
-  [twitter.com/epirocgroup](https://twitter.com/epirocgroup)
-  [instagram.com/epirocgroup](https://instagram.com/epirocgroup)
-  [linkedin.com/company/epiroc](https://linkedin.com/company/epiroc)

## United in performance. Inspired by innovation.

Performance unites us, innovation inspires us, and commitment drives us to keep moving forward. Count on Epiroc to deliver the solutions you need to succeed today and the technology to lead tomorrow.  
**[epiroc.com](https://epiroc.com)**

