

Excavator attachments

Demolition, recycling and earth-moving.
Experience our Hydraulic Attachment Tools.



PART OF THE ATLAS COPCO GROUP

Turn up the volume

Our Multi Grapples are ideal for loading and sorting various materials as well as demolishing wooden and masonry structures.




Our Multi Grapples handle any material with utmost precision. They deliver a steady grip and virtually constant closing force.

360° endless hydraulic rotation allows optimal positioning and precise handling.



Solid perforated shells provide excellent visibility during operations.


Cutting blades are both replaceable and reversible.



Optional tooth blades for block and stone handling (MG 400 – 1500).



Optional bolt-on side plates for handling fine-grained material and debris (MG 400 – 1500).

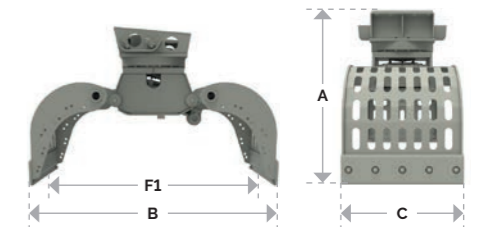

MG range		MG 100	MG 200	MG 300	MG 400	MG 500	MG 800	MG 1000
Carrier weight class ¹⁾	t	0.7 – 1.2	1.2 – 3	2 – 5	4 – 8	5 – 9	10 – 16	12 – 20
Service weight ²⁾	kg	90	175	290	450	460	825	1,150
Product weight	kg	71	155	255	384	396	752	966
A	mm	620	630	750	880	880	1,150	1,265
B	mm	600	900	1,187	1,480	1,585	1,791	1,900
C	mm	310	450	500	600	700	800	800
F1	t	0.6	1.5	2.0	2.3	2.4	3.8	4.6
Loading volume	m ³	0.02	0.05	0.11	0.21	0.25	0.35	0.49
Oil flow rate (opening & closing)	l/min	10 – 15	15 – 25	25 – 35	35 – 50	35 – 50	70 – 100	85 – 120
Max. operating pressure (opening & closing)	bar	300	300	300	300	300	350	350
Oil flow rate (rotation)	l/min	3 – 5	5 – 10	5 – 10	10 – 15	10 – 15	20 – 25	20 – 25
Max. operating pressure (rotation)	bar	170	170	170	170	170	170	170

MG range		MG 1500	MG 1800	MG 2300	MG 2700	MG 3000	MG 5000
Carrier weight class ¹⁾	t	16 – 24	20 – 28	25 – 38	28 – 50	35 – 50	45 – 100
Service weight ²⁾	kg	1,700	1,800	2,280	2,750	3,250	5,300
Product weight	kg	1,485	1,619	2,080	2,574	3,000	5,000
A	mm	1,500	1,500	1,450	1,635	1,800	2,000
B	mm	2,100	2,100	2,300	2,270	2,460	3,000
C	mm	1,020	1,200	1,200	1,200	1,500	1,500
F1	t	6.8	6.8	8.0	9.0	9.0	13.0
Loading volume	m ³	0.73	0.86	0.88	0.92	1.30	1.60
Oil flow rate (opening & closing)	l/min	120 – 170	150 – 170	160 – 180	180 – 200	180 – 200	280 – 300
Max. operating pressure (opening & closing)	bar	350	350	350	350	350	350
Oil flow rate (rotation)	l/min	30 – 35	30 – 35	30 – 35	30 – 35	30 – 35	50 – 60
Max. operating pressure (rotation)	bar	170	170	170	170	210	210

¹⁾ Weights apply to standard carriers only. Any variances must be agreed with Epiroc and/or the carrier manufacturer prior to attachment.

²⁾ Attachment with average-sized adapter plate.



Western Australia:

📞 +61 8 9248 9800
📠 +61 8 9209 3697

71 Prestige Parade
Wangara, Perth
WA 6065

Queensland & NT:

📞 +61 7 3635 7333
📠 +61 7 3635 7355

76 Dulacca Street
Acacia Ridge, Brisbane
QLD 4110

Victoria:

📞 +61 3 9308 8202
📠 +61 3 9308 8872

32 Freight Drive
Somerton, Melbourne
VIC 3062

WWW.BAEG.COM.AU

sales@baeg.com.au

**United in performance.
Inspired by innovation.**

Performance unites us, innovation inspires us, and commitment drives us to keep moving forward. Count on Epiroc to deliver the solutions you need to succeed today and the technology to lead tomorrow.
epiroc.com



PART OF THE ATLAS COPCO GROUP