



BREAKERS & ATTACHMENTS



ABOUT US

İnan Makina A.Ş, which is one of the renowned breaker and attachment manufacturers of the world, was established in İstanbul in 1972. Its founder **Mehmet TUSÇUOĞLU**, began his operations with lathing-leveling services. In the 1980s, production of hydraulic breaker spare parts was started and in 2002 “**First Local Breaker**” was produced with the brand MTB.

İnan Makina is continuing its operations with near 400 personals on an 82.000 m² ground with 67.000 m² closed area in Tekirdağ Çerkezköy Organized Industrial Site. İnan Makina has its attachments working in 6 continents and over 65 countries. Other than its factory, İnan Makina is providing quality service to its customers with its dealerships in Türkiye and abroad and İstanbul Europe and Asia, Ankara, Antalya, Burdur, Germany and Bulgaria branches.

Its R&D department, supported by the **Ministry of Industry and Technology** is developing attachments with patented designs such as; hydraulic breakers, demolition crushers, augers, compactors, grapples, drifters to meet harsh operation demands.

İnan Makina has over 70 breaker models with the MTB brand ranging from 90 kg to 7200 kg. Its 5-tonne and 7-tonne models are among the largest breakers in the World. İnan Makina has the honor of being the pride of its country by being a **FULLY INTEGRATED** facility with its near 150 latest technology CNC machines, robotic welding systems, metallography laboratory, and heat treatment facilities in its factory.





BREAKERS & ATTACHMENTS



ST SERIES (STANDARD) SMALL TYPE GAS BREAKER CROSS-SECTION

HIGH PRESSURE

Back Head Gas Breaker ■

On our "Gas Type" breakers, the hydraulic pressure and the nitrogen gas on top of the piston push the piston together to create the impact energy. Because there isn't an accumulator on top of the breaker and there is nitrogen gas on top of the piston, these kinds of breakers are called "Gas Type Breakers".

STRONGER

Piston Design ■

Stronger strike with its increased impact power and enhanced piston design!


PRICE - PERFORMANCE

Different Type Housing


Our breakers provide superior efficiency and reliability with our different type housings which were designed for suitable operations in various work environments.

They are available for many carrier machines such as mini excavators and backhoe loaders and they are a fast and economic solution for your operating needs.

They have a light design but are strong and reliable.

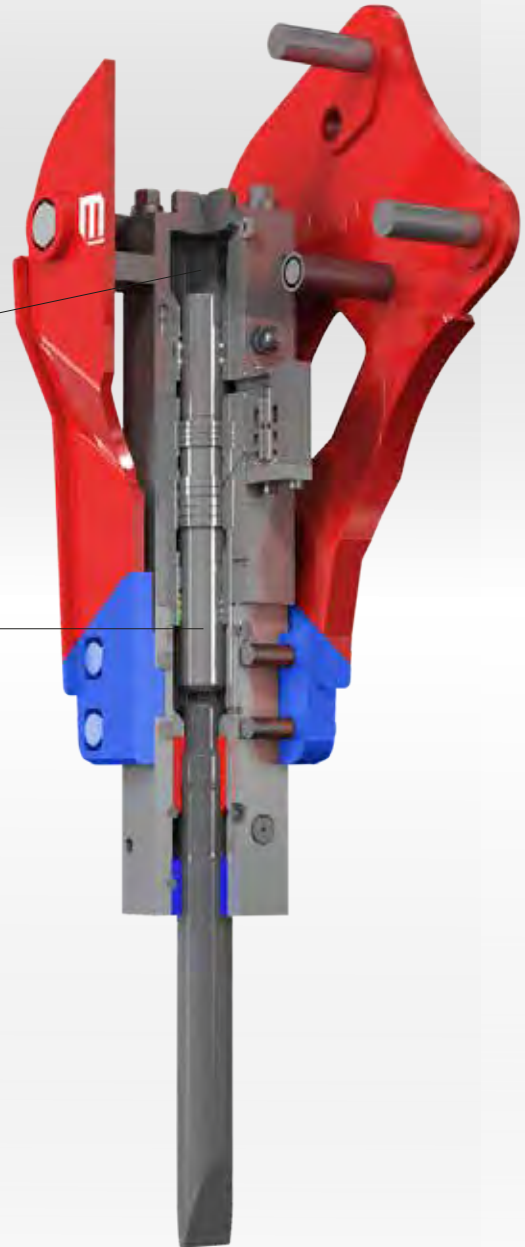

ST SERIES (STANDARD) SMALL TYPE GAS BREAKER

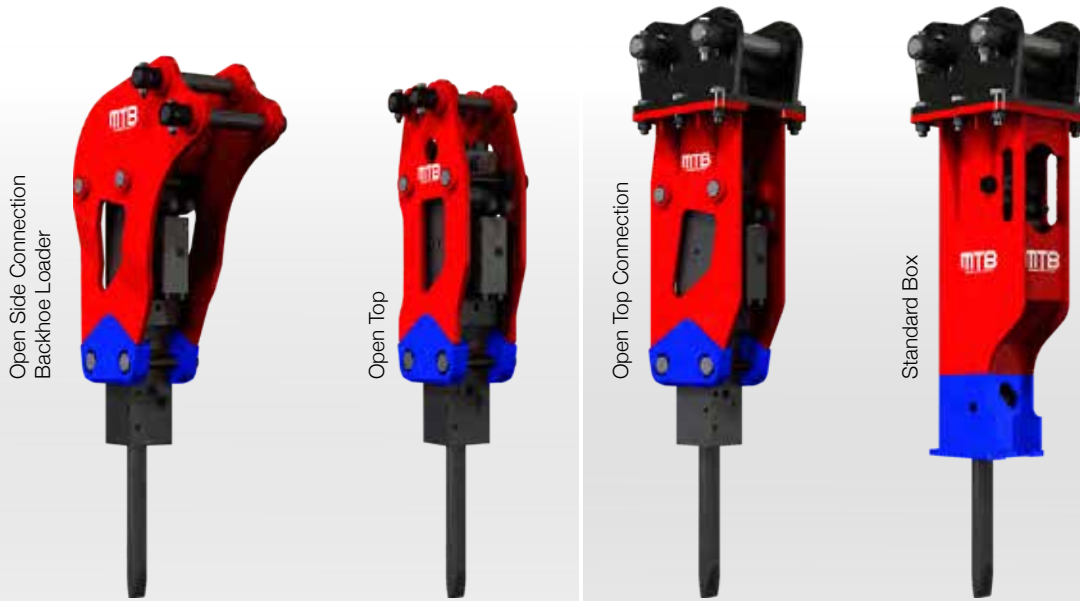

TECHNICAL INFORMATION			9 ST	11 ST	15 ST	21 ST	30 ST	40 ST
Operating weight (a)	Open side connection Backhoe Loader	kg	-	-	145	215	330	380
		lb	-	-	320	474	727	837
	Open top	kg	90	120	140	210	330	400
		lb	198	265	308	463	727	882
	Open top connection	kg	90	120	140	210	330	400
		lb	198	265	308	463	727	882
Standard Box	kg	95	115	155	225	350	450	
	lb	210	250	340	495	770	990	
Oil Flow	l/min	15~30	20~35	20~35	30~60	30~65	45~100	
	gal/min	4~7.9	5.3~9.2	5.3~9.2	7.9~15.9	7.9~17.2	11.9~26.4	
Impact Rate (b)	bpm	780~1440	800~1400	600~1150	600~1140	390~1000	450~1000	
Operating Pressure (c)	bar	120~125	120~125	120~125	120~125	120~125	120~125	
	psi	1740~1813	1740~1813	1740~1813	1740~1813	1740~1813	1740~1813	
Input power (d)	kW	3.0~6.3	4.0~7.3	4.0~7.3	6.0~12.5	6.0~13.5	9.0~20.8	
	hp	4.0~8.4	5.4~9.8	5.4~9.8	8.0~16.8	8.0~18.1	12~27.9	
Relief Pressure	bar	170	170	170	170	170	170	
	psi	2465	2465	2465	2465	2465	2465	
Back Pressure Max.	bar	12	12	12	12	12	12	
	psi	174	174	174	174	174	174	
Tool Diameter	mm Ø	38	45	50	68	70	80	
	in Ø	1.49	1.77	1.96	2.67	2.75	3.14	
Noise Level (e)	LWA (dB)	122	122	122	124	125	127	
Skid-steer loader (f)	t	0.7~1.2	1.2~1.8	1.4~2.4	2.0~3.5	2.5~4.2	4.8~7.5	
	lb	1545~2645	2645~3970	3085~5290	4400~7700	5510~9260	10600~16500	
Carrier Weight (f)	t	1~1.5	1.4~2.2	1.8~3.2	2.5~5.5	4.0~7.0	6.0~9.0	
	lb	2200~3300	3085~4850	3970~7050	5510~12125	8820~15430	13220~19840	

a. It includes the approximate weight of the breaker, bracket, standard tool and hose weights. b. Actual impact frequency depends on the oil flow, oil viscosity, temperature and the material to be broken. c. Actual pressure depends on the oil flow, oil viscosity, temperature, material to be broken and the return pressure. d. Input power directly effects fuel consumption. Low input power (kW) requirement means low fuel consumption. e. Guaranteed sound power testing results according to directive 2000/14/EC (Guaranteed dB(A)=Measured Value +3 dB). f. If the carrier machine is out of the optimum range, ask the carrier machine manufacturer for allowed attachment weight.

ST SERIES (STANDARD) SMALL TYPE HYDRAULIC BREAKER CROSS-SECTION

MORE RELIABLE

Membrane and Accumulator ■

With its highly resilient membrane and tough accumulator, our breakers impact with the same energy on every single stroke, thus providing maximum efficiency even when working on the hardest materials.

Piston Design ■

Stronger strike with its increased impact power and enhanced piston design!

LONGER LIFETIME

Hydraulic Cushioning ■


If the breaker blank-fires during operation, thanks to our hydraulic cushioning feature the piston won't hit the cylinder, therefore prolonging the lifetime of the components.

FOR CONFINED SPACES

Different Type Housing

Our breakers provide superior efficiency and reliability with our different type housings which were designed for suitable operations in various work environments.

They are available for many carrier machines such as mini excavators and backhoe loaders and they are a fast and economic solution for your operating needs. They have a light design but are strong and reliable.

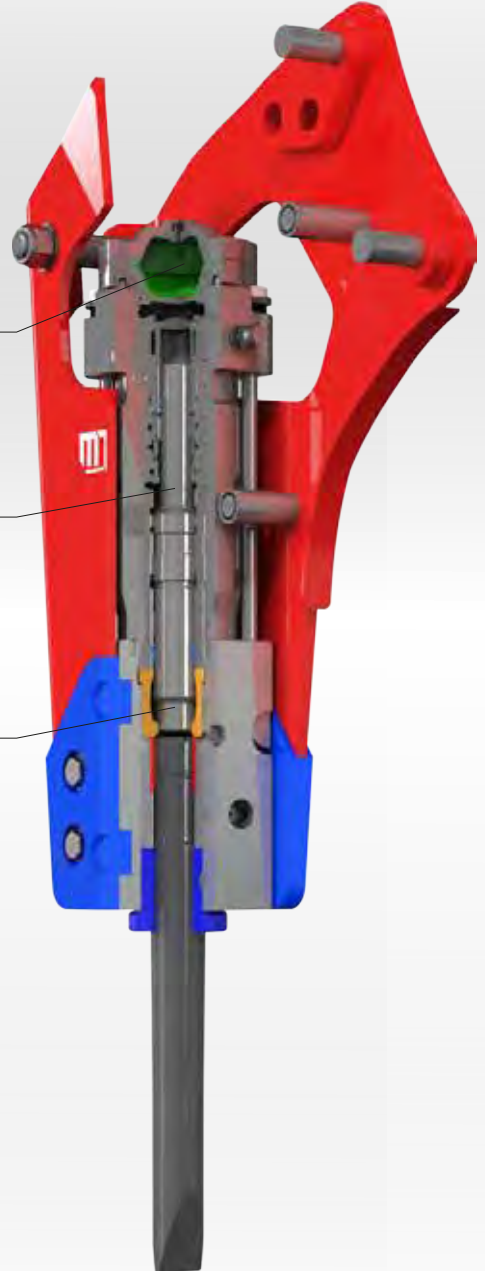

ST SERIES (STANDARD) SMALL TYPE HYDRAULIC BREAKER



TECHNICAL INFORMATION			25 ST	35 ST	36 ST	38 ST	45 ST
Operating weight (a)	Open side connection Backhoe Loader	kg	320	435	380	390	410
		lb	705	959	837	860	904
	Open top	kg	-	-	400	-	-
		lb	-	-	882	-	-
	Open top connection	kg	345	-	400	-	430
		lb	760	-	882	-	948
Standard Box	kg	330	-	450	450	485	
	lb	725	-	990	990	1070	
Oil Flow	l/min	30~60	50~100	50~100	50~100	50~100	
	gal/min	7.9~15.9	13.2~26.4	13.2~26.4	13.2~26.4	13.2~26.4	
Impact Rate (b)	bpm	440~890	490~990	490~990	490~990	440~880	
Operating Pressure (c)	bar	120~125	120~125	120~125	120~125	120~125	
	psi	1740~1813	1740~1813	1740~1813	1740~1813	1740~1813	
Input power (d)	kW	6.0~12.5	10~20.8	10~20.8	10~20.8	10~20.8	
	hp	8.0~16.8	13.4~27.9	13.4~27.9	13.4~27.9	13.4~27.9	
Relief Pressure	bar	180	180	180	180	180	
	psi	2610	2610	2610	2610	2610	
Back Pressure Max.	bar	10	10	10	10	10	
	psi	145	145	145	145	145	
Tool Diameter	mm Ø	70	75	75	80	85	
	in Ø	2.75	2.95	2.95	3.14	3.34	
Noise Level (e)	LWA (dB)	125	127	127	127	127	
Skid-steer loader (f)	t	2,5~4.2	3.8~5.5	3.8~5.5	3.8~5.5	4.8~7.5	
	lb	5510~9260	8380~12125	8380~12125	8380~12125	10600~16500	
Carrier Weight (f)	t	4.0~7.0	6.0~9.0	6.0~9.0	6.0~9.0	7.0~10	
	lb	8820~15430	13220~19840	13220~19840	13220~19840	15430~22050	

a. It includes the approximate weight of the breaker, bracket, standard tool and hose weights. b. Actual impact frequency depends on the oil flow, oil viscosity, temperature and the material to be broken. c. Actual pressure depends on the oil flow, oil viscosity, temperature, material to be broken and the return pressure. d. Input power directly effects fuel consumption. Low input power (kW) requirement means low fuel consumption. e. Guaranteed sound power testing results according to directive 2000/14/EC (Guaranteed dB(A)=Measured Value +3 dB). f. If the carrier machine is out of the optimum range, ask the carrier machine manufacturer for allowed attachment weight.

ST SERIES (STANDARD) MEDIUM AND LARGE TYPE HYDRAULIC BREAKER CROSS-SECTION

STRONGER

Membrane and Accumulator

With its highly resilient membrane and tough accumulator, our breakers impact with the same energy on every single stroke, thus providing maximum efficiency even when working on the hardest materials.

Piston Design

Stronger strike with its increased impact power and enhanced piston design!

MORE DURABLE

Hydraulic Cushioning

If the breaker blank-fires during operation, thanks to our hydraulic cushioning feature the piston won't hit the cylinder, therefore prolonging the lifetime of the components.

Wearing Plates

Our breakers have longer lifetime thanks to their highly resilient wearing plates which were specially designed for operating conditions.


MORE RELIABLE

Dual Retainer


Dual retainer design makes sure that the tool impacts with more balance.

Minimum Vibration

Minimum vibration and maximum performance with our excellent impact absorbant vibration buffers and polyurethane-covered tie-rods.

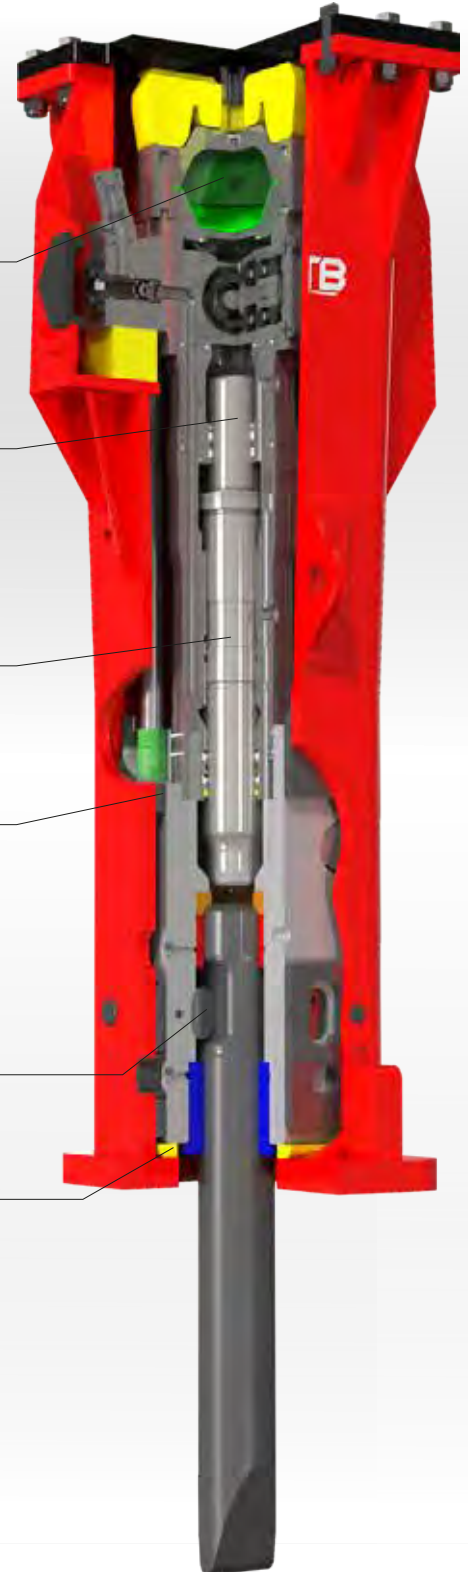


ST SERIES (STANDARD) MEDIUM TYPE HYDRAULIC BREAKER

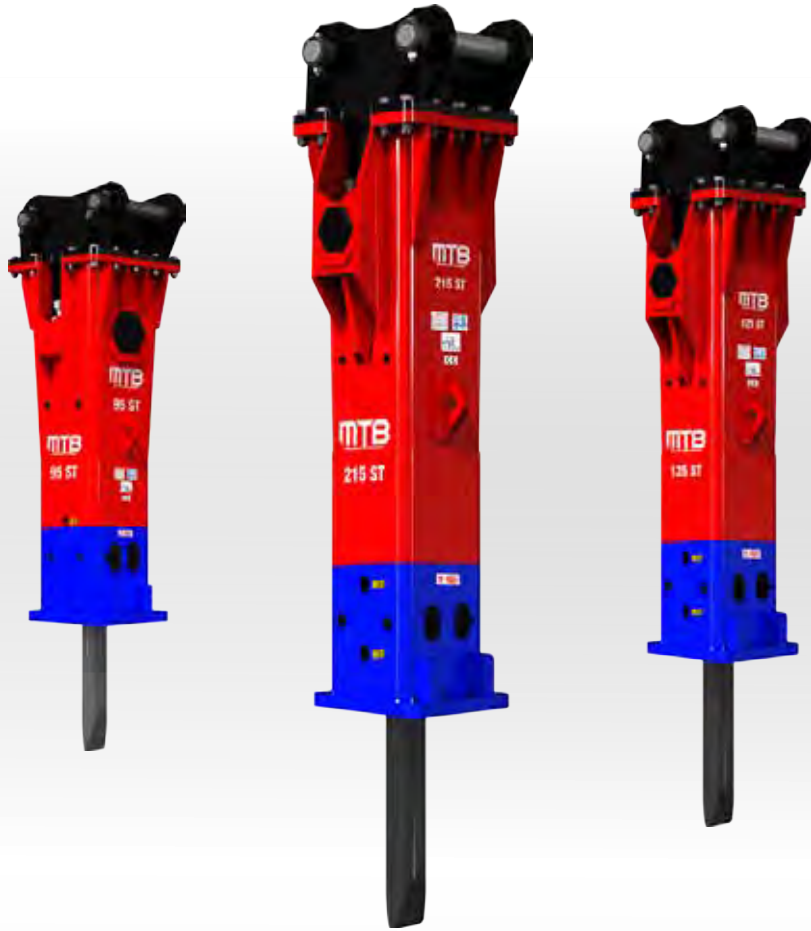

TECHNICAL INFORMATION		65 ST	95 ST	125 ST	155 ST	175 ST	215 ST
Operating weight (a)	kg	750	950	1250	1580	1900	2250
	lb	1650	2090	2750	3480	4190	4960
Oil Flow	l/min	60~110	70~120	80~130	100~150	120~180	160~210
	gal/min	15.9~29	18.5~31.7	21.1~34.4	26.4~39.6	31.7~47.5	42.2~55.5
Impact Rate (b)	bpm	360~670	360~630	460~760	360~550	360~550	370~490
Operating Pressure (c)	bar	125~130	125~130	135~140	135~140	135~140	140~145
	psi	1813~1885	1813~1885	1958~2030	1958~2030	1958~2030	2030~2103
Input power (d)	kW	12.5~23.8	14.6~26	18~30.3	22.5~35	27~42	37.3~50.7
	hp	16.8~31.9	19.5~34.9	24.1~40.6	30.2~46.9	36.2~56.3	50~68
Relief Pressure	bar	190	190	200	200	200	210
	psi	2755	2755	2900	2900	2900	3045
Back Pressure Max.	bar	8	8	8	8	8	8
	psi	116	116	116	116	116	116
Tool Diameter	mm Ø	95	100	115	125	135	145
	in Ø	3.74	3,93	4.52	4.92	5.31	5.7
Noise Level (e)	LWA (dB)	128	128	127	130	129	135
Carrier Weight (f)	t	8.0~14	10~16	16~22	18~25	22~29	26~32
	lb	17635~30860	22050~35270	35270~48500	39680~55115	48500~63935	57320~70550

a. It includes the approximate weight of the breaker, bracket, standard tool and hose weights. b. Actual impact frequency depends on the oil flow, oil viscosity, temperature and the material to be broken. c. Actual pressure depends on the oil flow, oil viscosity, temperature, material to be broken and the return pressure. d. Input power directly effects fuel consumption. Low input power (kW) requirement means low fuel consumption. e. Guaranteed sound power testing results according to directive 2000/14/EC (Guaranteed dB(A)=Measured Value +3 dB). f. If the carrier machine is out of the optimum range, ask the carrier machine manufacturer for allowed attachment weight.

ST SERIES (STANDARD) LARGE TYPE HYDRAULIC BREAKER

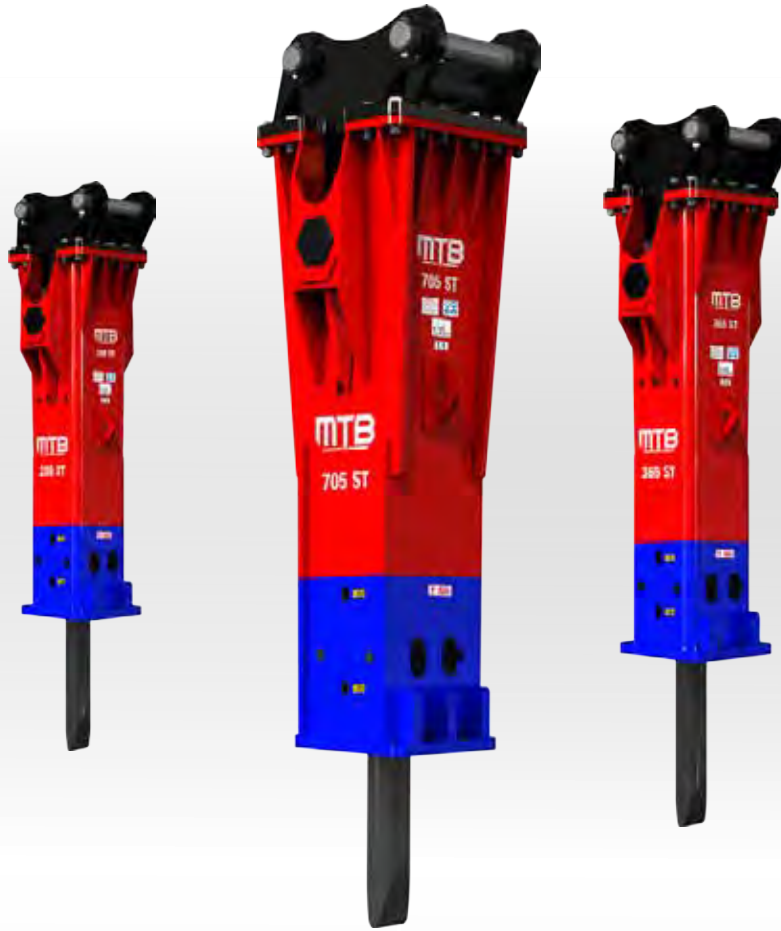

TECHNICAL INFORMATION		255 ST	285 ST	365 ST	505 ST	705 ST
Operating weight (a)	kg	2550	3000	3900	4650	7150
	lb	5620	6610	8600	10250	15760
Oil Flow	l/min	190~240	210~260	220~270	230~300	250~350
	gal/min	50.2~63.4	55.5~68.7	58.1~71.3	60.8~79.3	66~92.5
Impact Rate (b)	bpm	390~540	380~480	370~450	330~440	250~350
Operating Pressure (c)	bar	140~145	140~145	145~150	150~155	155~160
	psi	2030~2103	2030~2103	2103~2175	2175~2248	2248~2320
Input power (d)	kW	44.3~58	49~62.8	53.2~67.5	57.5~77.5	64.6~93.3
	hp	59.4~77.8	65.7~84.2	71.2~90.5	77.1~103.9	86.5~125.1
Relief Pressure	bar	210	210	210	210	220
	psi	3045	3045	3045	3045	3190
Back Pressure Max.	bar	8	8	8	8	8
	psi	116	116	116	116	116
Tool Diameter	mm Ø	150	160	175	190	210
	in Ø	5.9	6.29	6.88	7.48	8.26
Noise Level (e)	LWA (dB)	132	130	129	130	128
Carrier Weight (f)	t	32~39	35~45	45~55	50~65	65~100
	lb	70550~85980	77160~99210	99200~121250	110230~143300	143300~220460

a. It includes the approximate weight of the breaker, bracket, standard tool and hose weights. b. Actual impact frequency depends on the oil flow, oil viscosity, temperature and the material to be broken. c. Actual pressure depends on the oil flow, oil viscosity, temperature, material to be broken and the return pressure. d. Input power directly effects fuel consumption. Low input power (kW) requirement means low fuel consumption. e. Guaranteed sound power testing results according to directive 2000/14/EC (Guaranteed dB(A)=Measured Value +3 dB). f. If the carrier machine is out of the optimum range, ask the carrier machine manufacturer for allowed attachment weight.

UW SERIES (UNDERWATER) MEDIUM AND LARGE TYPE HYDRAULIC BREAKER CROSS-SECTION

CONTINUOUS SPRAY

Perfected Air Line

The pressured air coming from the compressor by a special air line inside the breaker is sent between the piston and the tool to push away the water. Therefore it prevents damage to the breaker and the excavator.

Membrane and Accumulator

With its highly resilient membrane and tough accumulator, our breakers impact with the same energy on every single stroke, thus providing maximum efficiency even when working on the hardest materials.

MORE DURABLE

Hydraulic Cushioning

If the breaker blank-fires during operation, thanks to our hydraulic cushioning feature the piston won't hit the cylinder, therefore prolonging the lifetime of the components.

Wearing Plates

Our breakers have longer lifetime thanks to their highly resilient wearing plates which were specially designed for operating conditions.


MORE RELIABLE

Dual Retainers


Dual retainer design makes sure that the tool impacts with more balance.

Minimum Vibration

Minimum vibration and maximum performance with our excellent impact absorbant vibration buffers and polyurethane-covered tie-rods.

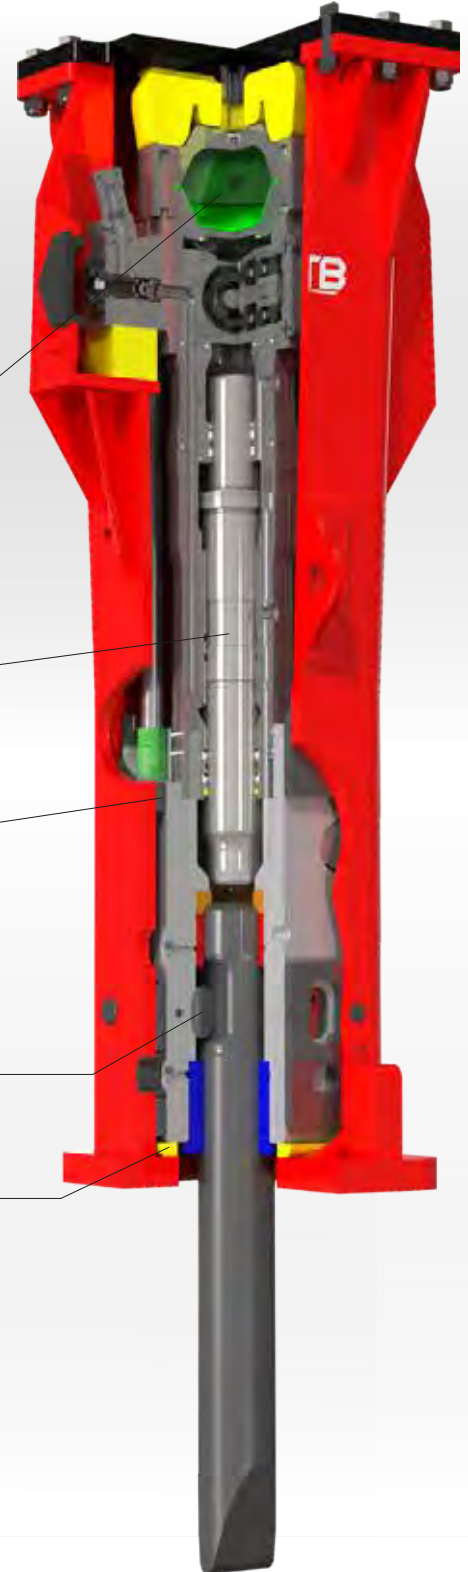


UW SERIES (UNDERWATER) SMALL TYPE HYDRAULIC BREAKER

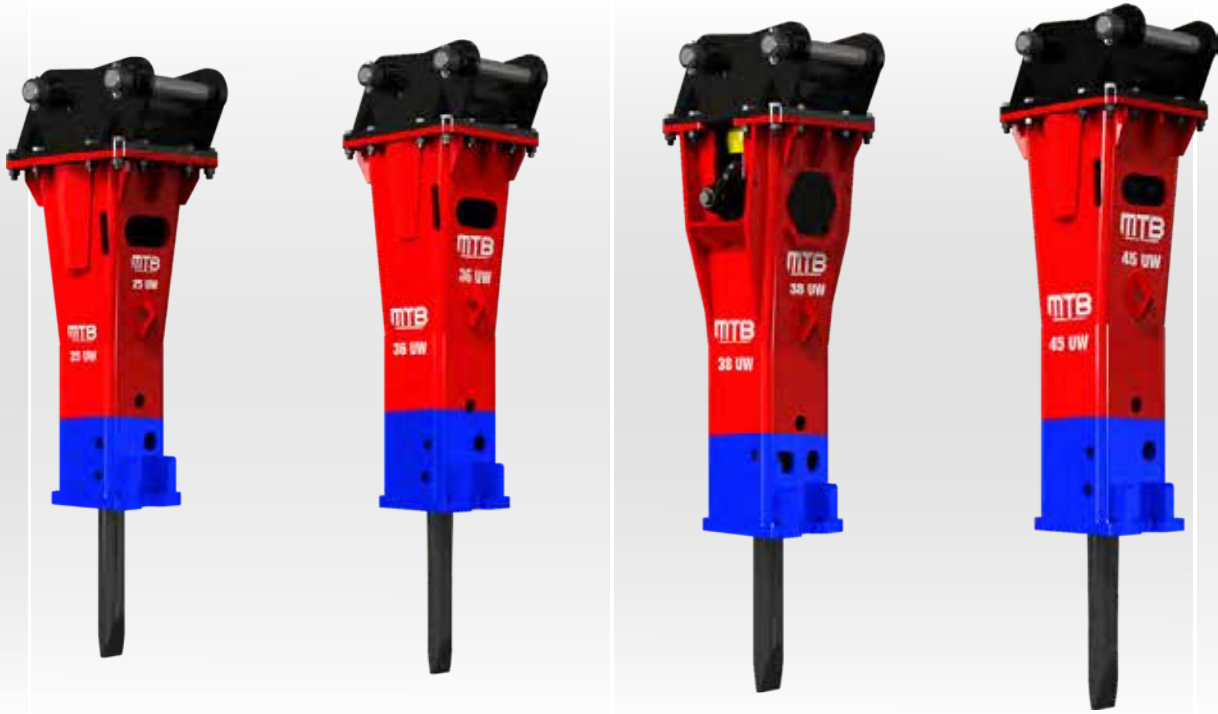

TECHNICAL INFORMATION			25 UW	36 UW	38 UW	45 UW
Operating weight (a)	Standard box	kg	330	450	450	485
		lb	725	990	990	1070
Oil Flow		l/min	30~60	50~100	50~100	50~100
		gal/min	7.9~15.9	13.2~26.4	13.2~26.4	13.2~26.4
Impact Rate (b)		bpm	440~890	490~990	490~990	440~880
Operating Pressure (c)		bar	120~125	120~125	120~125	120~125
		psi	1740~1813	1740~1813	1740~1813	1740~1813
Input power (d)		kW	6.0~12.5	10~20.8	10~20.8	10~20.8
		hp	8.0~16.8	13.4~27.9	13.4~27.9	13.4~27.9
Relief Pressure		bar	180	180	180	180
		psi	2610	2610	2610	2610
Back Pressure Max.		bar	10	10	10	10
		psi	145	145	145	145
Tool Diameter		mm Ø	70	75	80	85
		in Ø	2.75	2.95	3.14	3.34
Noise Level (e)		LWA (dB)	125	127	127	127
Skid-steer loader (f)		t	2,5~4.2	3.8~5.5	3.8~5.5	4.8~7.5
		lb	5510~9260	8380~12125	8380~12125	10600~16500
Carrier Weight (f)		t	4.0~7.0	6.0~9.0	6.0~9.0	7.0~10
		lb	8820~15430	13220~19840	13220~19840	15430~22050

a. It includes the approximate weight of the breaker, bracket, standard tool and hose weights. b. Actual impact frequency depends on the oil flow, oil viscosity, temperature and the material to be broken. c. Actual pressure depends on the oil flow, oil viscosity, temperature, material to be broken and the return pressure. d. Input power directly effects fuel consumption. Low input power (kW) requirement means low fuel consumption. e. Guaranteed sound power testing results according to directive 2000/14/EC (Guaranteed dB(A)=Measured Value +3 dB). f. If the carrier machine is out of the optimum range, ask the carrier machine manufacturer for allowed attachment weight.


UW SERIES (UNDERWATER) MEDIUM TYPE HYDRAULIC BREAKER

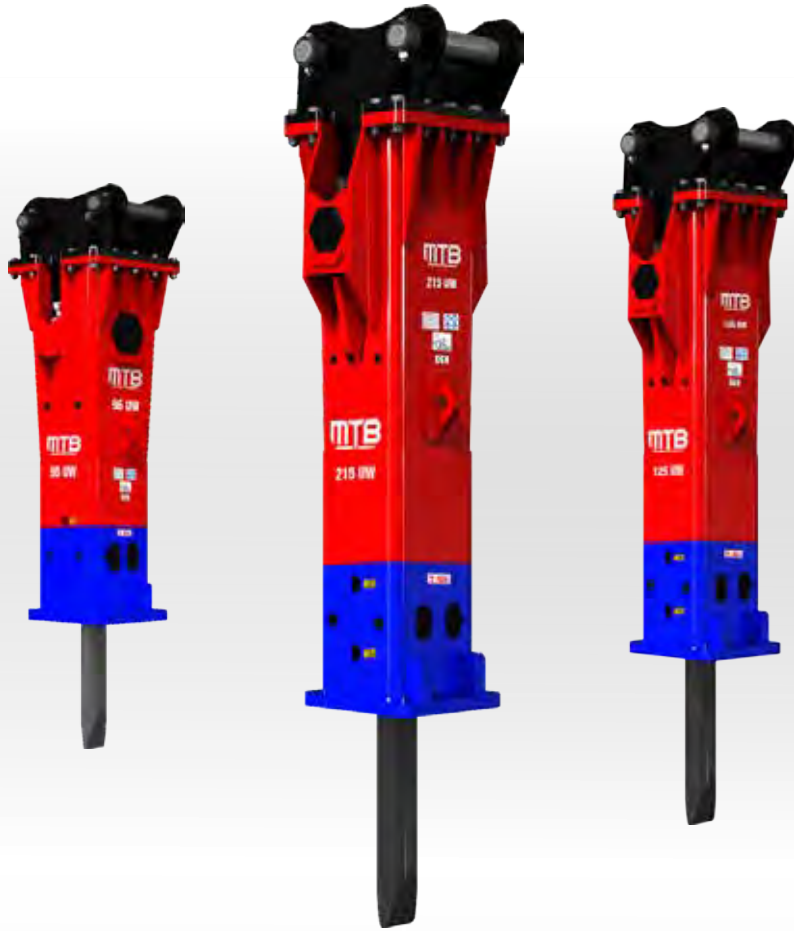

TECHNICAL INFORMATION		65 UW	95 UW	125 UW	155 UW	175 UW	215 UW
Operating weight (a)	kg	750	950	1250	1580	1900	2250
	lb	1650	2090	2750	3480	4190	4960
Oil Flow	l/min	60~110	70~120	80~130	100~150	120~180	160~210
	gal/min	15.9~29	18.5~31.7	21.1~34.4	26.4~39.6	31.7~47.5	42.2~55.5
Impact Rate (b)	bpm	360~670	360~630	460~760	360~550	360~550	370~490
Operating Pressure (c)	bar	125~130	125~130	135~140	135~140	135~140	140~145
	psi	1813~1885	1813~1885	1958~2030	1958~2030	1958~2030	2030~2103
Input power (d)	kW	12.5~23.8	14.6~26	18~30.3	22.5~35	27~42	37.3~50.7
	hp	16.8~31.9	19.5~34.9	24.1~40.6	30.2~46.9	36.2~56.3	50~68
Relief Pressure	bar	190	190	200	200	200	210
	psi	2755	2755	2900	2900	2900	3045
Back Pressure Max.	bar	8	8	8	8	8	8
	psi	116	116	116	116	116	116
Tool Diameter	mm Ø	95	100	115	125	135	145
	in Ø	3.74	3,93	4.52	4.92	5.31	5.7
Noise Level (e)	LWA (dB)	128	128	127	130	129	135
Carrier Weight (f)	t	8.0~14	10~16	16~22	18~25	22~29	26~32
	lb	17635~30860	22050~35270	35270~48500	39680~55115	48500~63935	57320~70550

a. It includes the approximate weight of the breaker, bracket, standard tool and hose weights. b. Actual impact frequency depends on the oil flow, oil viscosity, temperature and the material to be broken. c. Actual pressure depends on the oil flow, oil viscosity, temperature, material to be broken and the return pressure. d. Input power directly effects fuel consumption. Low input power (kW) requirement means low fuel consumption. e. Guaranteed sound power testing results according to directive 2000/14/EC (Guaranteed dB(A)=Measured Value +3 dB). f. If the carrier machine is out of the optimum range, ask the carrier machine manufacturer for allowed attachment weight.

UW SERIES (UNDERWATER) LARGE TYPE HYDRAULIC BREAKER

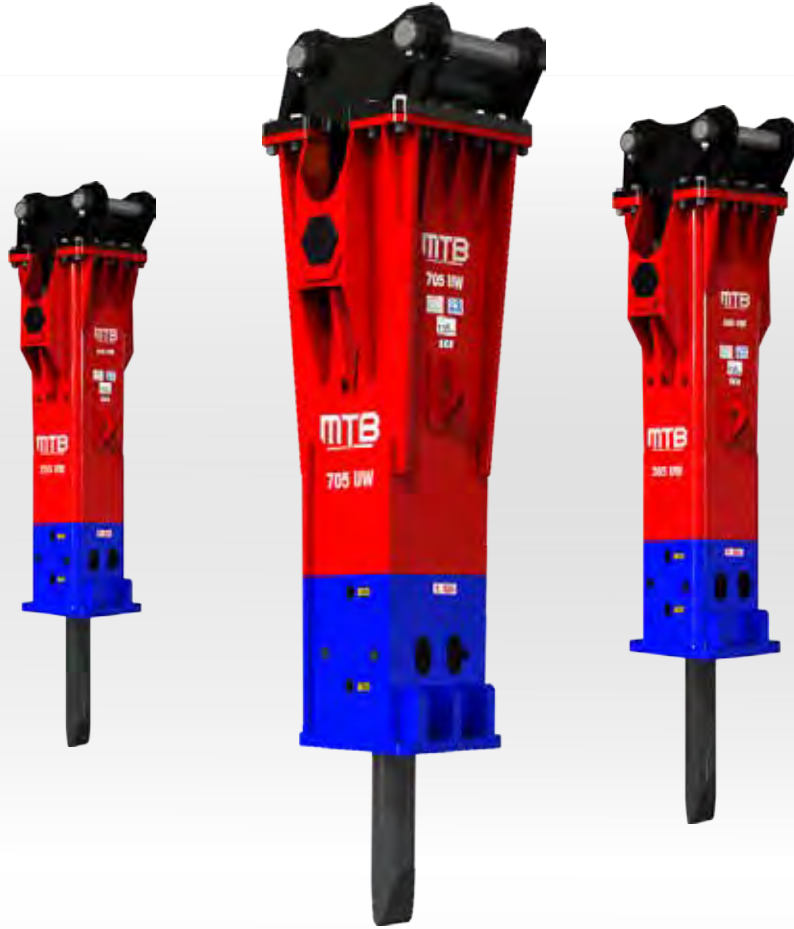

TECHNICAL INFORMATION		255 UW	285 UW	365 UW	505 UW	705 UW
Operating weight (a)	kg	2550	3000	3900	4650	7150
	lb	5620	6610	8600	10250	15760
Oil Flow	l/min	190~240	210~260	220~270	230~300	250~350
	gal/min	50.2~63.4	55.5~68.7	58.1~71.3	60.8~79.3	66~92.5
Impact Rate (b)	bpm	390~540	380~480	370~450	330~440	250~350
Operating Pressure (c)	bar	140~145	140~145	145~150	150~155	155~160
	psi	2030~2103	2030~2103	2103~2175	2175~2248	2248~2320
Input power (d)	kW	44.3~58	49~62.8	53.2~67.5	57.5~77.5	64.6~93.3
	hp	59.4~77.8	65.7~84.2	71.2~90.5	77.1~103.9	86.5~125.1
Relief Pressure	bar	210	210	210	210	220
	psi	3045	3045	3045	3045	3190
Back Pressure Max.	bar	8	8	8	8	8
	psi	116	116	116	116	116
Tool Diameter	mm Ø	150	160	175	190	210
	in Ø	5.9	6.29	6.88	7.48	8.26
Noise Level (e)	LWA (dB)	132	130	129	130	128
Carrier Weight (f)	t	32~39	35~45	45~55	50~65	65~100
	lb	70550~85980	77160~99210	99200~121250	110230~143300	143300~220460

a. It includes the approximate weight of the breaker, bracket, standard tool and hose weights. b. Actual impact frequency depends on the oil flow, oil viscosity, temperature and the material to be broken. c. Actual pressure depends on the oil flow, oil viscosity, temperature, material to be broken and the return pressure. d. Input power directly effects fuel consumption. Low input power (kW) requirement means low fuel consumption. e. Guaranteed sound power testing results according to directive 2000/14/EC (Guaranteed dB(A)=Measured Value +3 dB). f. If the carrier machine is out of the optimum range, ask the carrier machine manufacturer for allowed attachment weight.



BREAKERS & ATTACHMENTS



NOTE

A series of horizontal dotted lines for writing notes.



SALES | HIRE | PARTS | SERVICE

WA/SA:
sales@baeg.com.au

📞 +61 8 9248 980
71 Prestige Parade, Wangara
Perth WA 6065

QLD/NT/PNG:
sales@baeg.com.au

📞 +61 7 3635 7333
76 Dulacca Street, Acacia Ridge,
Brisbane QLD 4110

VIC
sales@baeg.com.au

📞 +61 3 9308 8202
32 Freight Drive, Somerton
Melbourne VIC 3062

www.BAEG.com.au